



DANIELE & GIRAUDO




RETROESCAVATORI
BACKHOES

Qualità e tecnologia per un lavoro più facile e produttivo



Bloccaggio idraulico traslazione
Hydraulic locking

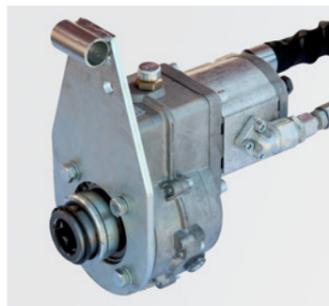

Pompa idraulica - Hydraulic pump



I retroscavatori Daniele&Giraudò si applicano, tramite un sistema standard di staffatura o direttamente ai bracci del sollevatore, a tutte le trattrici gommate o cingolate.

L'aggancio e lo sgancio è semplice e veloce. In fase di lavoro, lo sforzo è ripartito su due piedi di appoggio, senza danneggiare la trattrice.

I martinetti oleodinamici consentono di muovere i bracci e la benna che a loro volta sono comandati dal distributore idraulico con valvole tramite leve a cloche alloggiato nella consolle di comando.

I martinetti sono alimentati da una pompa, che a sua volta riceve il moto direttamente dalla presa di forza della trattrice.

Il sedile ergonomico dell'operatore, facilmente accessibile e regolabile, consente un'ampia visibilità rendendo il lavoro più sicuro e meno gravoso.



Quality and technology for easier and more productive work



Comandi - Lever control

Daniele&Giraudò backhoes can be applied to all the wheeled or tracked tractors by means of a standard clamping system or, alternatively, directly to the lifter arms.


Fastening and unfastening operations are simple and fast. During operation, stress is equally divided between two stands in order to avoid damage to the tractor.

The oil hydraulic jacks move the arms and the bucket, which in turn are controlled by the valve hydraulic distributor by means of levers located at the control console.

The jacks are fed by a pump that is operated directly from the tractor power take-off.

The operator's seat has an ergonomic design and it is easily accessible and adjustable.

It provides a wide visual angle and makes work safer and less tiring.

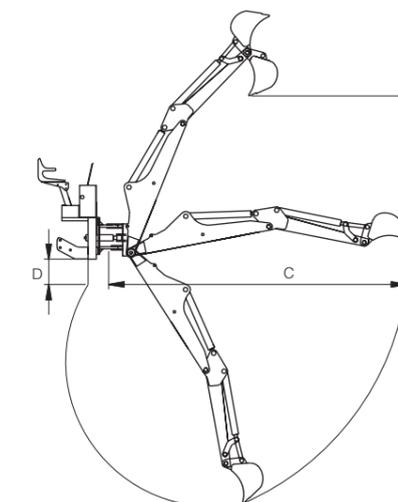

Caratteristiche tecniche	Technical features		DG120 R	DG150 R	DG200 R	DG250 R	DG300 R
Profondità di scavo (A)	Digging depth (A)	mm	1900	2100	2500	2945	3315
Altezza utile di scarico (B)	Useful unloading height (B)	mm	1550	1750	2100	2500	2895
Distanza massima di scavo (C)	Maximum digging distance (C)	mm	2650	2900	3300	3810	4345
Luce minima dal suolo (D)	Minimum gap from ground (D)	mm	280	280	280	280	280
Larghezza telaio standard	Standard chassis width	mm	1100	1500	1500	1800	2000
Peso con pompa e serbatoio	Weight with pumps and tank	kg	450	510	530	770	940
Larghezza benna standard	Standard bucket width	mm	250	300	300	400	500
Bloccaggio sulla traslazione	Locking on translation		idraulico/hydraulic				
Forza di stappo al dente	Unplugged force on tooth	kg	1500	2000	2200	2500	2800
Portata ottimale della pompa	Optimum pump capacity	lt/min	20	20	20	26	32



Daniele&Giraudò has been working for over twenty years in the farming and forestry sector. It designs and builds a wide range of forestal loaders, frontal loaders, backhoes, snowploughs and grit spreaders: all the machines are versatile, strong and suitable for use in conditions of extreme stress.

Daniele&Giraudò is today a point of reference in the sector.

Daniele&Giraudò operates throughout Europe and is furthermore expanding to new international markets.



Daniele&Giraudò snc
Costruzioni meccaniche - Macchine per l'agricoltura
Mechanical constructions - Farm machinery
via Levaldigi 9 - 12020 Vottignasco (CN) - Italy
tel +39 0171 941020 - fax +39 0171 941263
danielegiraudò@cheapnet.it - www.danieleegiraudò.com

DANIELE & GIRAUDO